



FIRST

25

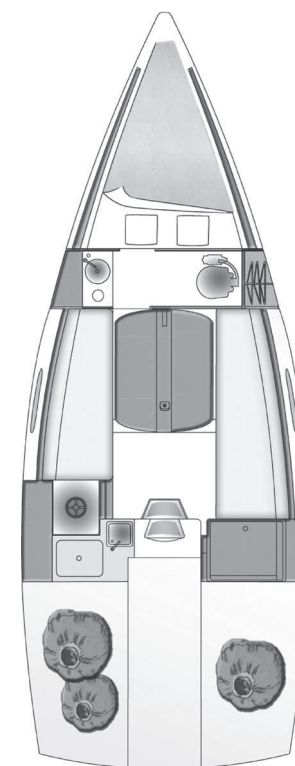

Standard

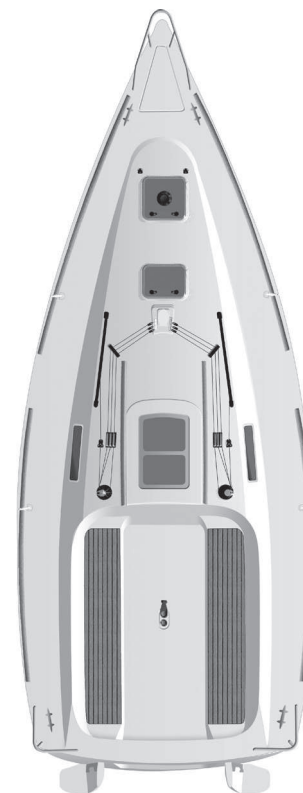

by NORTH
SAILS



RETRACTABLE
KEEL

QUILLE
RELEVABLE

Optional



RAYMARINE®
TACKTICK



FIXED KEEL
QUILLE FIXE

General Specifications

Caractéristiques Générales | Caratteristiche Generali | Características Generales | Allgemeine Eigenschaften

LONGUEUR HORS TOUT • L.O.A. • LUNGHEZZA FUORI TUTTO • ESLOA TOTAL • LÄNGE ÜBER ALLES	7,90 M / 25'11"
LONGUEUR COQUE • HULL LENGHT • LUNGHEZZA SCAFO • ESLOA CASCO • LÄNGE RUMPF	7,50 M / 24'7"
LONGUEUR FLOTTAISON • L.W.L. • LUNGHEZZA AL GALLEGGIAMENTO • ESLOA FLOTACIÓN • LÄNGE WASSERLINIE	7,35 M / 24'1"
LARGEUR COQUE • BEAM • LARGHEZZA SCAFO • MANGA CASCO • BREITE RUMPF	2,75 M / 9'
TIRANT D'EAU QUILLE RELEVABLE • DRAUGHT WITH RETRACTABLE KEEL • PESCAGGIO CHIGLIA SOLLEVABILE • CALADO QUILLA ELEVABLE TIEFGANG KIEL AUFSTECKBAR	0,85 - 1,85 M / 2'9" - 6'1"
POIDS DU LEST QUILLE RELEVABLE • BALLAST WITH RETRACTABLE KEEL • PESO DELLA ZAVORRA CHIGLIA SOLLEVABILE PESO DEL LASTRE QUILLA ELEVABLE • BALLASTGEWICHT KIEL AUFSTECKBAR	620 KG / 1,367 LBS
TIRANT D'EAU COURT • SHALLOW DRAUGHT • PESCAGGIO CORTO • CALADO CORTO • TIEFGANG KURZKIEL	1,45 M / 4'9"
POIDS DU LEST COURT • SHALLOW BALLAST WEIGHT • PESO CHIGLIA CORTA • PESO QUILLA CORTA • LEERGEWICHT BEI KURZKIELVERSION	615 KG / 1,356 LBS
TIRANT D'AIR • AIR DRAUGHT • ALTEZZA MASSIMA • ALTURA SOBRE FLOTACIÓN • AUSTAUCHUNG	12,50 M / 41'
DÉPLACEMENT LÈGE CE • LIGHT DISPLACEMENT (EC) • DISLOCAMENTO A VUOTO • DESPLAZAMIENTO EN ROSCA CE • LEERE VERDRÄNGUNG CE	2150 KG / 4,740 LBS
CAPACITÉ D'EAU • FRESHWATER CAPACITY • CAPACITÀ SERBATOIO ACQUA • CAPACIDAD AGUA • WASSERTANK	40 L / 11 US GAL
CAPACITÉ CARBURANT • FUEL CAPACITY • CAPACITÀ SERBATOIO CARBURANTE • CAPACIDAD CARBURANTE • KRAFTSTOFFFASSUNGSVERMÖGEN	30 L / 8 US GAL
PUISSANCE MOTEUR • ENGINE POWER • POTENZA MOTORE • POTENCIA MOTOR • MOTORLEISTUNG	14 CV / 14 HP
GRAND-VOILE • MAINSAIL (CLASSIC) • RANDA • VELA MAYOR • GROSSSEGEL	23,50 M ² / 253 SQ FT
GÉNOIS 100% • GENOA (100 %) • GENOA (100 %) • GÉNOVA (100 %) • GENUA-KLUVER (100 %)	15 M ² / 161 SQ FT
SPI ASYMÉTRIQUE • ASYMMETRIC SPINNAKER • SPI ASIMMETRICO • SPI ASIMÉTRICO • ASYMMETRISCHER SPINNAKER	51,53 M ² / 555 SQ FT
CERTIFICATION CE • EC CERTIFICATE • ATTESTATO CERTIFICAZIONE CE • CERTIFICACIÓN CE • CE FAHRTGEBIETZERTIFIKAT	C8 / D8
ARCHITECTES • ARCHITECTS • ARCHITETTI • ARQUITECTOS • ARCHITEKTEN	FINOT CONQ ET ASSOCIÉS
MENUISERIE INTÉRIEURE • INTERIOR WOODWORK • RIFINITURE IN LEGNO • EBANISTERÍA INTERIORES • INNERE SCHREINEREI	ALPI TECK BLOND / LIGHT ALPI TECK

Polar Diagram

VPP First 25

